

# Notes from Lenticular Images Class using StereoPhoto Maker, Class 1

- 1) Two diagrams for class discussion on how lenticular 3D works. See Figure 1 (page 3) and Figure 2 (page 4).
- 2) Methods of taking lenticular images:
  - a) Take two images and then using a “morphing” program fill in the in-between images.
  - b) Use a camera that has many lenses (like the Nishika 3D or Nimslo 3D cameras).
  - c) Rig up many cameras on a bar to trigger by one shutter control.
  - d) Use one camera on a slide bar at many positions.**
- 3) Two empirical formula for helping set up the multi image shoot.
  - a)  $\text{Camera shift} = \text{Distance from point of view} / (8 \times \text{number of images used})$ .
  - b)  $\text{Maximum distance from closest image to background} = \text{Distance from camera} / 5$ .
- 4) Other helpful suggestions
  - a) Make sure nothing moves during all the images you take.
  - b) Start on the LEFT moving to the RIGHT.
  - c) Try not to tilt the camera L/R differently as you take the each image.
  - d) Try not to point the camera up or down too much with different images.
  - e) Make sure the zoom, focus or other camera settings don't change each exposure.
  - f) Compose the image using the zoom to cover a little more than the image you want to end up with. Final lenticular images look best arranged so half the 3D image is in front of the lenticular sheet and the other half of the image is behind the sheet.
  - g) Pick the point in your object that you want to be at the screen level and always point the camera at the same point in the object. This aiming point should be ~1/2 way between the fore most item and background. This part of the image will be at the lenticular level and it will be the best focused part of the lenticular image.
  - h) Take a few more images that you expect to use. (for common printers today, and the 60 LPI lenticular sheet stock, 12 images is the most you can use)
  - i) Save all your images in a new (easy to find) folder on your computer.

## Using Stereo Photo Maker to process images


- 5) Launch Stereo Photo Maker and select – file/Multiple Images/X-Y adjustment and cropping
- 6) Find and open your new image file. Set “Output File Type” to your preference (I use JPG). Make sure the “Output Folder” is where you want to store the processed images. If you want your results in the same folder, enter a unique prefix name in “file Prefix” (if you don’t SPM will overwrite your original images).
- 7) Select the images you want to look at and click on “Adjust Selected Files” or click on “Adjust All Files”
- 8) Click on “Test” and SPM will display all the images sequentially (L to R)
- 9) If your images tilt as they are presented or bounce up and down too much, you need to let SPM align your images. Cancel out of “test” and exit “X-Y adjustment”.
- 10) Select – file/Multiple Images/Auto rotation adjustment (one by one)
- 11) Before you start, make sure you choose a different “Output Folder” you want or change the “File Prefix” so you don’t over write the original images and select the appropriate “Adjust Files” button. This can take several minutes if there are many large images.
- 12) With the new images repeat steps 5) through 8) and the images should be better.
- 13) Now click “Set Point” and set the cross hairs on a sharp point in the image that you want to be in the level of the lenticular sheet of your picture (half way between the back most part and the fore most part of the image. Set this same point on each of the images.
- 14) Click on “Mask” and it will show the part of this image that is common to all the images.
- 15) Click on “Crop” and select the part of the image that you want.
- 16) Click on “OK” and SPM will crop all the images to the common point you selected and save them where you said with the new prefix you input. Otherwise it will overwrite the original images.
- 17) With the new aligned and cropped images repeat steps 5) through 8) and the images should rotate smoothly from left view to right view and these images will be what you will want to print next time. Make sure you save these images and bring them to the next class. If you have time do some more images at home and bring them as well. See you next week, same time same place.

David W. Allen [dwa.stereo@gmail.com](mailto:dwa.stereo@gmail.com)


Other software:

SuperFlip [www.vuethru.com/filedownload.html](http://www.vuethru.com/filedownload.html) this was freeware

Figure 1: Viewing from two Different Positions

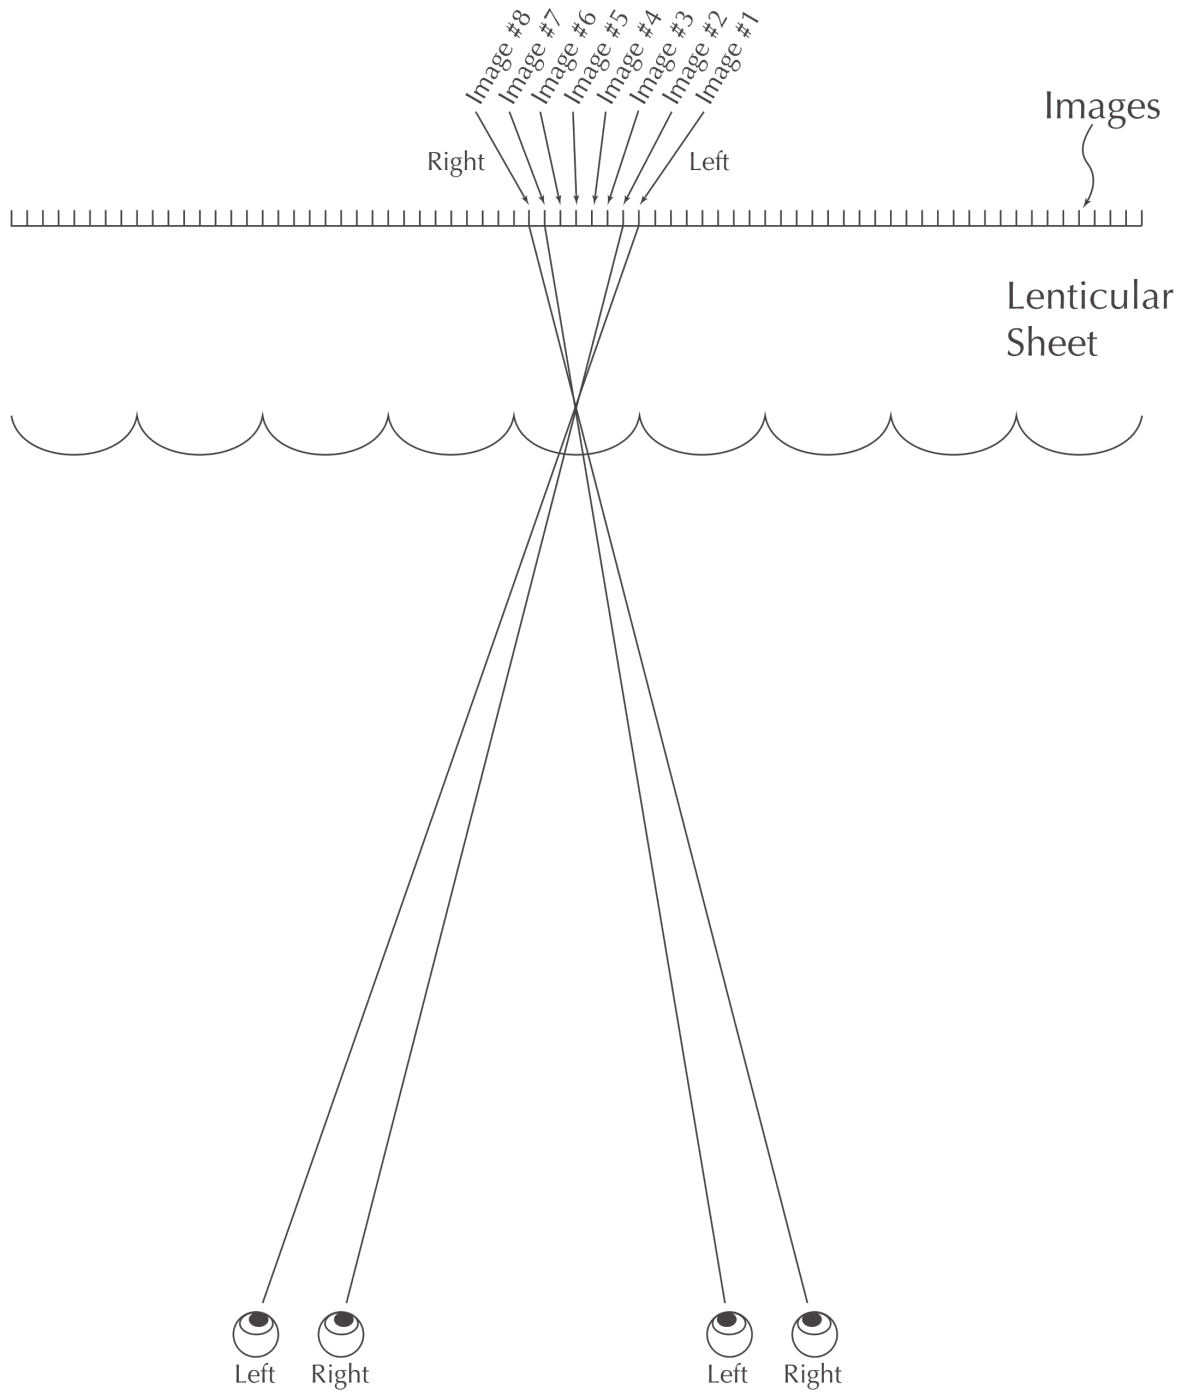

# Figure 2: Lenticular Lens Diagram

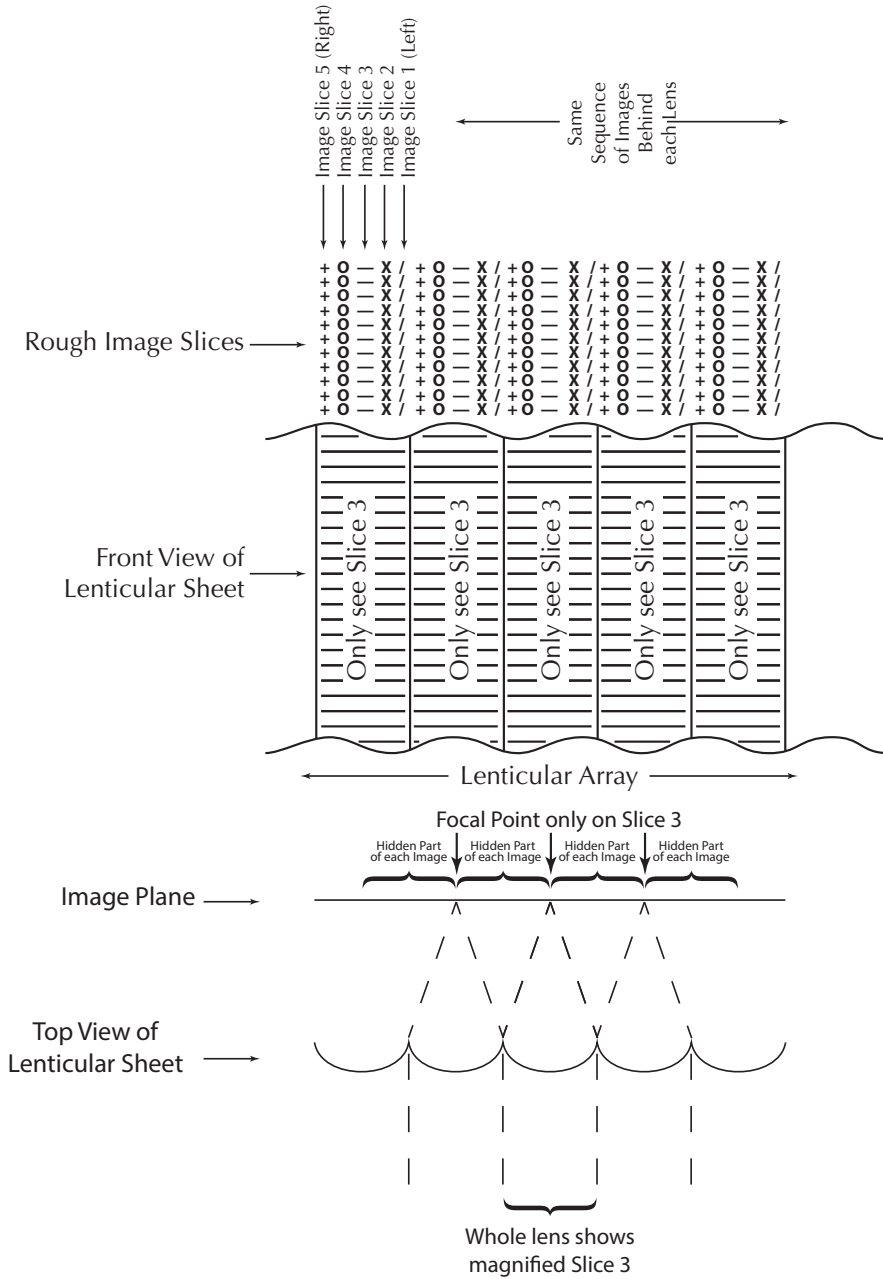

# Notes from Lenticular Images Class using StereoPhoto Maker, Class 2

18) From previous class you should have 8 to 12 images that have been aligned and cropped and “test” smoothly in Stereo Photo Maker. If you did more at home, we can print some of them as well.

- a) Start StereoPhoto Maker and select “file/Multiple Images/Create Lenticular Image....” Find your folder with your image files and select the 8 to 12 images you want to use for the lenticular.
- b) Set the box “Lenticular Lens Pitch” to 60 (or the pitch of whatever lenticular sheet you have).
- c) Set the box “Printer Resolution” to 720 (or whatever the maximum your printer resolution is). (See (j) below on Printer Resolution)
- d) Set the box “Print width” to the size of your final print (I would recommend about 7” or less) (see section 4 below for the need of extra paper on each side)
- e) Make sure “Image Direction (left to right)” is checked
- f) Click on “Create With Selected Files” Wait a while and POP! You have the image file to be printed. Save this file with a new name.

19) Printing your lenticular composite image.

- g) Select “file/Print Setup....” From the main Stereo Photo Maker window
- h) Click on the “Printer” button in the lower right to set up your printer
- i) If you have multiple printers, make sure you have the best printer and select its properties. Set to “Best Photo Quality” and “Best Photo Paper”. These names may be different with your paper and on your printer. Click OK to get back to the Stereo Photo Maker “Print” window.
- j) Note that Stereo Photo Maker now shows the printer resolution that your printer is set for, up in the upper right corner. **This number (detected by Stereo Photo Maker) is to be used in all previous steps requiring printer resolution!**
- k) Make sure the box “Print dot by dot” is selected. The image should show up in the window the size and position it will be printed. Move the image over to the top, middle of the print page (see section 4 below for the need of extra paper on each side)
- l) Load the good paper and print you image.

20) Mounting your lenticular image using non sticky back lenticular sheets

- m) After you image dries (sometimes several minutes) so you can touch it without smearing it, cut the image to size only on the top and bottom. Leave the un-printed sides attached to the image
  - n) Cut the lenticular sheet so it is just 1/8" larger on each side than your finished image. There are several ways to cut this material including a good table saw or a fine toothed saw or with a plastic sheet scribe. I use a ruler and X-ACTO knife to cut the sheets. Remember, the material is fragile and can crack or chip when cutting.
  - o) Lay your printed image on a table. Lay the cut to size lenticular sheet on top of your image. The lenticular sheet is taller than the image so tape the top and bottom of the lenticular sheet material to the table.
  - p) Now you can move the image (by the sides that stick out from the edge of the lenticular sheet) so you can align the image to the lenticular sheet to show the 3D effect.
  - q) When it is aligned properly, tape the sides of the image to the lenticular sheet. Now you can lift sheet and image off the table and turn it over without losing the alignment. Tape the top and bottom of the image to the 1/8" overhang of the sheet. After you have checked to see that the image is still aligned properly, you can cut off the sides of the paper image with the knife and ruler, and tape the sides to the lenticular sheet. There are other methods to attach a lenticular sheet that has an adhesive coating on the back.
- 21) You now have a finished 3D lenticular image.

#### **More valuable notes and test images added after the Class:**

- 1) Lenticular sheets and printers are sometimes not exactly equal to each other in pitch. Here are a few calibration pitch images I made for 60LPI starting at 59.85LPI, through 60.00LPI, up to 60.35LPI. These might be helpful in testing how well your printer matches the pitch of your lenticular sheets. Print them and see how they work with your sheet. You can make your own calibration sheets with the 12 small images also included.
- 2) SPM seems to only print "point for point". When you use a 720dpi printer and set SPM to 60LPI everything is just fine – you get exactly 12 images (points) for each lens, but if you set SPM to 60.05LPI then SPM has to insert an extra line every so often to accommodate. This can be seen in the final image. I always use SPM at exactly 60.00LPI for a 720dpi printer and then use Photoshop to increase the LPI by printing the picture just a tad larger or smaller as needed for my particular lenticular sheet. Photoshop will blend the adjacent pixels at the edges of each image strip of the lenticular images and it doesn't show like SPM.

- 3) Lenticular images should be printed with the viewing distance in mind. A small image may be viewed at 10" to 18". A larger image may be viewed at 30" to 40". The angle that one's eyes see through the lenticular lenses is different at 10" and at 40". When you adjust the print LPI of your image for 3D affect over the whole image, make sure you test it at the distance you expect to be viewing it.
- 4) Some lenticular software automatically puts alignment strips on the top and sides of an image. (Several black and white lines at the lenticular pitch) These are very useful when aligning the image to the lenticular sheet. If you don't have such software, you can do the same thing by making the 4 middle images of your set of 12 images have a small black border and the rest of the images have the same size white border. When it is printed you will have the alignment strips all around your image.